

Please type a plus sign (+) inside this box ☐

Approved for use through 9/30/00, OMB 0651-0032  
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

00AB015

First Inventor or Application Identifier

Kerry Vandesteeg

Title

Network Independent Safety Protocol for Industrial Controller

Express Mail Label No.

EJ 636 886 889 US

## APPLICATION ELEMENTS

See MPEP Chapter 600 concerning utility patent application contents

ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, D.C. 20231

- 1 ☒ Fee transmittal Form  
(Submit an original and a duplicate for fee processing)
- 2 ☒ Specification [Total Pages 26]  
(preferred arrangement set forth below)
- Descriptive title of the invention
  - Cross References to Related Applications
  - Statement Regarding Fed Sponsored R&D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure

- 6 ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
- a. ☐ Computer readable Copy
  - b. ☐ Paper Copy (identical to computer copy)
  - c. ☐ Statement Verifying identity of above

- 3 ☒ Drawing(s) (35 USC 113) [Total Sheets 12]

4. Oath or Declaration [Total Pages 3]

- a. ☒ Newly executed (original or copy)
- b. ☐ Copy from prior Application (37 CFR 1.63(d))  
(for continuation/divisional with Box 17 completed)
- [Note Box 5 below]
- i. ☐ DELETION OF INVENTOR(S)  
Signed Statement attached deleting  
inventor(s) named in prior application,  
see 37 CFR 1.63(d)(2) and 1.33(b).

- 5 ☐ Incorporation By Reference (useable if Box 4b is checked)  
The entire disclosure of the prior application from  
which a copy of the oath or declaration is supplied  
under Box 4b, is considered as being part of the  
disclosure of the accompanying application and is  
hereby incorporated by reference herein.

## ACCOMPANYING APPLICATION PARTS

- 8 ☒ Assignment Papers (cover sheet & documents)
- 9 ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney  
(where there is an assignee)
- 10 ☐ English Translation Document (if applicable)
- 11 ☐ Information Disclosure  
Statement (IDS)/PTO-1449 ☐ Copies of IDS  
Citations
- 12 ☐ Preliminary Amendment
- 13 ☒ Return receipt postcard (MPEP 503)  
(Should be specifically itemized)
- 14 ☐ \*Small Entity ☐ Statement filed in prior application  
Statement(s) ☐ Status still proper and desired
- 15 ☐ Certified copy of priority Document(s)  
(if foreign priority is claimed)
- 16 ☐ Other:

\* A new statement is required to pay small entity fees, except where  
one has been filed in a prior application and is being relied upon

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application no. \_\_\_\_\_

Prior application information: Examiner: \_\_\_\_\_

Group/Art Unit: \_\_\_\_\_


## 18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label)

or ☒ Correspondence address below

NAME	John J. Horn				
	Patent Dept. 704P, 8th Floor, T-29				
ADDRESS	Rockwell Technologies, LLC				
	1201 S. Second Street				
CITY	Milwaukee	STATE	WI	ZIP CODE	53204-2496
COUNTRY	USA	TELEPHONE	(414) 382-3960	FAX	(414) 382-3900

Name (Print/Type)	John J. Horn	Registration No. (Attorney/Agent)	28,803
Signature		Date	Sept. 18, 2000

DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS SEND TO Assistant Commissioner for Patents, Washington, DC 20231  
4604125 110003.97061

**FEE TRANSMITTAL  
for FY 2000**

Patent fees are subject to annual revision.

Small Entity payments must be supported by a small entity statement  
otherwise large entity fees must be paid. See Forms PTO/SB/09-12  
See 37 C.F.R. §§1.27 and 1.28

TOTAL AMOUNT OF PAYMENT \$730.00

**Complete if Known**

Application Number	
Filing Date	Herewith
First Named Inventor	Kerry Vandesteeg
Group Art Unit	
Examiner Name	
Attorney Docket Number	00AB015

**METHOD OF PAYMENT (check one)**1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any over payments to:

Deposit Account Number 01-0857

Deposit Account Name Rockwell Automation

☒ Charge Any Additional Fee Required  
Under 37 CFR 1.16 and 1.172. ☐ Payment Enclosed:☐ Check ☐ Money Order ☐ Other**FEE CALCULATION (continued)****3. ADDITIONAL FEES**

Large Entity Fee Code	Large Entity Fee (\$)	Small Entity Fee Code	Small Entity Fee (\$)	Fee Description	Fee Paid
105	130	205	65	Surcharge - late filing fee or oath	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet	
139	130	139	130	Non-English specification	
147	2,520	147	2,520	For filing a request for reexamination	
112	920	112	920	Requesting publication of SIR prior to Examiner action	
113	1,840	113	1,840	Requesting publication of SIR after Examiner action	
115	110	215	55	Extension for reply within first month	
116	380	216	190	Extension for reply within second month	
117	870	217	435	Extension for reply within third month	
118	1,360	218	680	Extension for reply within fourth month	
128	1,850	228	925	Extension for reply within fifth month	
119	300	219	150	Notice of Appeal	
120	300	220	150	Filing a brief in support of an appeal	
121	260	221	130	Request for oral hearing	
138	1,510	138	1,510	Petition to institute a public use proceeding	
140	110	240	55	Petition to revive unavoidably abandoned application	
141	1,210	241	605	Petition to revive unintentionally abandoned application	
142	1,210	242	605	Utility issue fee (or reissue)	
143	430	243	215	Design issue fee	
144	580	244	290	Plant issue fee	
122	130	122	130	Petitions to the Commissioner	
123	50	123	50	Petitions related to provisional applications	
126	240	126	240	Submission of Information Disclosure Stmt	
581	40	581	40	Recording each patent assignment per property (times number of properties)	40.00
146	690	246	345	Filing a submission after final rejection (37 CFR 1.129(a))	
149	690	249	345	For each additional invention to be examined (37 CFR 1.129(b))	
Other fee (specify) _____					
Other fee (specify) _____					

\* Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$40.00)

**FEE CALCULATION****1. BASIC FILING FEE**

Large Entity Fee Code	Large Entity Fee (\$)	Small Entity Fee Code	Small Entity Fee (\$)	Fee Description	Fee Paid
101	690	201	345	Utility filing fee	690.00
106	310	206	155	Design filing fee	
107	480	207	240	Plant filing fee	
108	690	208	345	Reissue filing fee	
114	150	214	75	Provisional filing fee	
SUBTOTAL (1)					(\$690.00)

**2. CLAIMS**

	Total Claims	Extra	Fee from below	Fee Paid
Total Claims	19	-20**= 0	X --	= --
Independent	2	-3**= 0	X --	= --
Multiple Dependent Claims				=

\*\* or number previously paid, if greater, For reissues see below

Large Entity Fee Code	Large Entity Fee (\$)	Small Entity Fee Code	Small Entity Fee (\$)	Fee Description
103	18	203	9	Claims in excess of 20
102	78	202	39	Independent claims in excess of 3
104	260	204	130	Multiple dependent claim
109	78	209	39	Reissue independent claims over original patent
110	18	210	9	Reissue claims in excess of 20 and over original patent
SUBTOTAL (2) (\$).00				

**SUBMITTED BY**


Typed or Printed Name John J. Horn

Registration No. (Attorney/Agent) 28,803

**Complete (if applicable)**

Telephone 414-382-3561

Signature



Date

Sept. 18, 2000

# NETWORK INDEPENDENT SAFETY PROTOCOL FOR INDUSTRIAL CONTROLLER

## CROSS-REFERENCE TO RELATED APPLICATIONS

5 This application claims the benefit of provisional application 60/171,439 filed on December 22, 1999.

## STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

--

## BACKGROUND OF THE INVENTION

10 The present invention relates to industrial controllers used for real-time control of industrial processes, and in particular to high-reliability industrial controllers appropriate for use in devices intended to protect human life and health. "High reliability" refers generally to systems that guard against the propagation of erroneous data or signals by detecting error or fault conditions and signaling their occurrence and/or entering into a predetermined fault state. High reliability systems may be distinguished from high availability systems, however, the present invention may be useful in both such systems and therefore, as used herein, high reliability should not be considered to exclude high availability systems.

15 Industrial controllers are special purpose computers used in controlling industrial processes. Under the direction of a stored control program, an industrial controller examines a series of inputs reflecting the status of the controlled process and changes a series of outputs controlling the industrial process. The inputs and outputs may be binary, that is, on or off, or analog, providing a value within a continuous range. The inputs may be obtained from sensors attached to the controlled equipment and the outputs may be signals to actuators on the controlled equipment.

20 "Safety systems" are systems intended to ensure the safety of humans working in the environment of an industrial process. Such systems may include the electronics associated with emergency stop buttons, interlock switches and machine lockouts. Traditionally, safety systems have been implemented by a set of circuits wholly separate from the industrial control system used to control the industrial process with which the safety system is associated. Such safety systems are "hard-wired" from switches and relays, some of which

25

30

may be specialized "safety relays" allowing comparison of redundant signals and providing internal checking of conditions such as welded or stuck contacts. Safety systems may use switches with dual contacts providing an early indication of contact failure, and multiple contacts may be wired to actuators so that the actuators are energized only if multiple contacts close.

Hard-wired safety systems have proven inadequate, as the complexity of industrial processes has increased. This is in part because of the cost of installing and wiring relays and in part because of the difficulty of troubleshooting and maintaining the "program" implemented by the safety system in which the logic can only be changed by rewiring physical relays and switches.

For this reason, there is considerable interest in implementing safety systems using industrial controllers. Such controllers are easier to program and have reduced installation costs because of their use of a high-speed serial communication network eliminating long runs of point-to-point wiring.

Unfortunately, high-speed serial communication networks commonly used in industrial control are not sufficiently reliable for safety systems. For this reason, efforts have been undertaken to develop a "safety network" being a high-speed serial communication network providing greater certainty in the transmission of data. Currently proposed safety networks are incompatible with the protocols widely used in industrial control. Accordingly, if these new safety networks are adopted, existing industrial controller hardware and standard technologies may be unusable, imposing high costs on existing and new factories. Such costs may detrimentally postpone wide scale adoption of advanced safety technology.

What is needed is a safety network that is compatible with conventional industrial controller networks and components. Ideally such a safety network would work with a wide variety of different standard communication protocols and would allow the mixing of standard industrial control components and safety system components without compromising reliability.

#### BRIEF SUMMARY OF THE INVENTION

The present invention provides a network-independent, high-reliability communications system by imposing two levels of protocol on data being transmitted over the network. The first level of protocol provides the high-reliability necessary for a safety

system while the second level of protocol encapsulates the protocol of the safety system allowing it to be transmitted on a standard network.

The safety network of the present invention is compatible with a wide variety of standard networks and standard network hardware and also allows safety and non-safety components to be intermixed through the medium of the standard network. The safety protocol adds error detection data to transmitted data, all of which is treated as data by the standard network. The safety protocol also adds timing requirements for message transmission that ensure reliable transmission but that can remain invisible to the protocol of the standard network.

Specifically the present invention provides a network-independent, high-reliability communication system for an industrial controller making use of a standard serial communication network. The communication system includes a first I/O communication circuit receiving I/O data for control of an industrial process. This I/O data may be input or output data and the circuit may be at an industrial controller or at its I/O module. The I/O data is received by a first network-independent protocol circuit which formats it for transmission under a network-independent protocol to produce high-reliability formatted data, formatted so as to reduce errors in transmission. The high-reliability formatted data is received by a standard network protocol circuit, which further formats it for transmission under a protocol of the standard serial communication network. In this way, it produces doubly-formatted data for transmission on the standard serial communication network. The formatting of the protocol for the standard serial communication network also reduces errors in transmission. After transmission over a standard serial communication network, the doubly-formatted data is received by a second standard network protocol circuit, which extracts the high-reliability formatted data according to the protocol of the standard serial communication network. The data is then received by a second network-independent protocol circuit extracting from the high-reliability formatted data, the original I/O data. A second I/O communication circuit receives the I/O data for control of the industrial process.

Thus it is one object of the invention to provide for a high-reliability communication system that may nevertheless use the standard circuitry and protocols of common, well-developed and commercially available serial communication networks. The safety formatting is embedded in the standard protocol of the serial network, which treats the formatted safety data as normal data to be transmitted.

The first network-independent protocol circuit may format the I/O data by adding error detection methods selected from the group consisting of cyclic redundancy codes related to the I/O data and sequence counts related to the local order of transmission of the I/O data with respect to other I/O data being transmitted.

Thus it is another object of the invention to provide for high-reliability communication for safety systems regardless of the presence or absence of error reduction data in the protocol of the standard serial network.

The second network-independent protocol circuit may further generate an acknowledgement message upon receipt of the I/O data formatted under the network-independent protocol to produce high-reliability formatted acknowledgement data. The second standard network protocol circuit may receive the high-reliability formatted acknowledgement data and further formats it for transmission under the protocol of the standard serial communication network to produce doubly-formatted acknowledgement data for transmission on the standard serial communication network. The first standard network protocol circuit may receive the doubly-formatted acknowledgement data from the standard serial communication network and extract the high-reliability formatted acknowledgement data according to the protocol of the standard serial communication network. Finally, the first network-independent protocol circuit may receive the high-reliability formatted acknowledgement data to detect transmission errors.

Thus it is another object of the invention to provide for the detection of lost messages regardless of this capability in the standard serial network. The timing protocol may operate invisibly to the standard serial network as implemented at a higher level. By providing a closed loop of transmission, the present invention can detect errors not only in the transmission media but also in the processing circuitry and other components such as processors within that communications loop. Errors introduced from any one or all of these sources will be termed "transmission loop errors".

Upon detection of an error, the second network-independent protocol circuit may assume a default safety state of the I/O data.

Thus it is another object of the invention to provide not simply for the detection of errors but for the defaulting of I/O data to default states as is necessary for proper safety operation.

The foregoing and other objects and advantages of the invention will appear from the following description. In the description, reference is made to the accompanying drawings,

which form a part hereof, and in which there is shown by way of illustration a preferred embodiment of the invention. Such embodiment does not necessarily represent the full scope of the invention, however, and reference must be made to the claims herein for interpreting the scope of the invention.

## BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view of a simplified industrial controller using a standard serial communication network linking a central controller with remote input and output circuits and with a remote configuration terminal, such as may be used in the present invention;

Fig. 2 is a schematic block diagram of the control system of Fig. 1 showing redundant wiring from an input switch to the input circuit of Fig. 1, the input circuits having redundant components such as may process the signals from the input switch to send signals over the communication network to the controller of Fig. 1, the controller having redundant processors to send signals over the communications network to the output circuit of Fig. 1, the output circuit having redundant components to provide outputs to an actuator;

Fig. 3 is a fragmentary view similar to Fig. 2, showing an alternative configuration of the input circuit of Fig. 2 using conventional control input circuits without redundant components;

Fig. 4 is a fragmentary view similar to Fig. 2, showing an alternative configuration of the output circuit of Fig. 2 using conventional control output circuits without redundant components;

Fig. 5 is a representational view of the dual communication protocols provided by the present invention in which data is first encoded with a safety protocol and then with a network protocol to be compatible with the serial network;

Fig. 6 is a schematic representation of a data word transmitted over the standard serial network showing the embedding of safety formatting data with I/O data within the formatting provided by the standard serial network;

Fig. 7 is a graphical representation having time on the vertical axis and distance along the network on the horizontal axis, showing transmission of configuration messages to the input circuit, the controller and the output circuit, forming the foundation of the safety protocol of the present invention;

Fig. 8 is a figure similar to that of Fig. 7 showing the transmission of messages after the configuration process during a start-up and run-time phase of the network;

Fig. 9 is a block diagram of the industrial controller of Fig. 1 showing the division of communications between the input circuit, the controller and the output circuit into producer-consumer pairs such as provides redundant communication over a single network and the varied topologies of the implementations of Figs. 2, 3 and 4;

Fig. 10 is a flow chart showing the principle stages of the safety protocol of initialization, start-up, and run-time;

Fig. 11 is a figure similar to that of Fig. 7 showing normal protocol operation under the safety protocol of the present invention during run-time;

Fig. 12 is a figure similar to Fig. 11 showing protocol operation with a corrupted producer message;

Fig. 13 is a figure similar to Fig. 11 showing protocol operation with a lost producer message;

Fig. 14 is a figure similar to Fig. 11 showing protocol operation with a corrupted acknowledgement message from the consumer;

Fig. 15 is a figure similar to Fig. 11 showing protocol operation with a lost consumer acknowledgement message;

Fig. 16 is a figure similar to Fig. 11 showing protocol operation with disruption of the connection between the producer and consumer;

Fig. 17 is a flow chart of a program executed by the producers of Fig. 9 in implementing the safety protocol; and

Fig. 18 is a flow chart of a program executed by the consumers of Fig. 9 in implementing the safety protocol of the present invention.

## DETAILED DESCRIPTION OF THE INVENTION

The present invention can be part of a "safety system" used to protect human life and limb in the industrial environment. Nevertheless, the term "safety" as used herein is not a representation that the present invention will make an industrial process safe or that other systems will produce unsafe operation. Safety in an industrial process depends on a wide variety of factors outside of the scope of the present invention including: design of the safety system, installation and maintenance of the components of the safety system, and the cooperation and training of individuals using the safety system. Although the present invention is intended to be highly reliable, all physical systems are susceptible to failure and provision must be made for such failure.



Referring now to Fig. 1, an industrial control system 10 for implementing a safety system with the present invention includes a controller 12 communicating on a serial network 15 with remote input module 14 and remote output module 16. The network 15 may be a standard and commonly available high-speed serial network including but not limited to: Ethernet, DeviceNet, ControlNet, Firewire or FieldBus. The network 15 may optionally include a bridge 17 translating between different of the above standard or other protocols. As will be understood from the following, the present invention may be easily adapted to applications that use a bridge.

Input module 14 may accept input signals 18 (on like-designated lines) which are communicated over the network 15 to the industrial controller 12. At the industrial controller 12 the signals 18 may be processed under a control program implementing a safety system (such as a machine lock-out or emergency stop) and further signals sent to the output module 16 which may produce output signals 20 (on like-designated lines) to an actuator 22.

The input signals 18 may come from a switch 19 which may be any of a variety of devices producing safety input signals including but not limited to emergency stop switches, interlock switches, light curtains and other proximity detectors. The actuator 22 may be a relay, solenoid, motor, enunciator, lamp or other device implementing a safety function.

Also connected to the network 15 is a standard computer, which may be used as a configuration terminal 24 whose purposes will be described below.

#### Redundant System Hardware

Referring now to Fig. 2, the switch 19 may produce redundant signals 18a and 18b where signal 18a is, for example, from a first contact within the switch 19, and signal 18b is from a second independent contact within switch 19. The contacts may have the same logic (as shown) both being normally open (e.g., closed with actuation of a pushbutton 26) or may be inverted logic with one contact normally open and one contact normally closed. In either case, redundant signals 18a and 18b are generated so as to provide for higher reliability in the determining the state of the switch 19.

The input module 14 may include redundant interface circuitry 28a receiving signals 18a and interface circuitry 28b receiving signal 18b. Alternatively, but not shown, interface circuitry 28a and 28b may each receive both signal 18a and 18b (for internal comparison) or may receive signals 18a and 18b from a single contact. The contacts, in generating signals 18a and 18b, may each be provided with a separate voltage from the input circuitry 28a and

28b or from a common voltage source (not shown). Other redundant variations on these wiring systems, known in the art, may also be used.

Each of the interface circuitry 28a and 28b may in turn provide signals to associated microcontrollers 30a and 30b. Microcontrollers 30a and 30b provide a computer processor, memory and a stored program for executing safety protocol programs as will be described below. Alternatively, or in addition, the safety protocol may be executed by safety protocol circuits 32 with which microcontrollers 30a and 30b communicate. In this case, the safety protocol circuits 28a and 28b may be application-specific integrated circuits (ASIC). As it is well known in the art to implement protocols through hardware or software or combinations of each, the term “protocol device” as used herein and in the claims should be understood to embrace generally any combination of software and hardware components implementing the indicated functions.

The microcontrollers 30a and 30b may communicate with each other through an internal bus 34 to compare signals 18a and 18b as will be described.

Microcontrollers 30a and 30b or safety protocol circuits 28a and 28b in turn connect to standard network protocol circuits 36a and 36b of a type well known in the art for handling the low level protocol of the standard network 15. Typically, the standard network protocol circuits 36a and 36b are implemented by an ASIC whose implementation represents considerable development time and which cannot be easily modified.

The standard network protocol circuits 36a and 36b transmits signals from the input module 14 on the network 15 to be received at the controller 12 through a similar standard network protocol circuits 38a and 38b. These signals are processed by the standard network protocol circuit 38 and provided to redundant safety protocol circuits 40a and 40b, being similar to safety protocol circuits 32a and 32b described before. These safety protocol circuits 40a and 40b communicate with processors 42a and 42b, respectively, which include separate memory systems and control programs according to well-known redundancy techniques and which intercommunicate on internal bus 34'. Output signals generated by the processors 42a and 42b may be communicated back through the safety protocol circuits 40a and 40b to implement the safety protocol, as will be described below (or alternatively, the safety protocol may be handled by the processor 42a and 42b), and the output signals communicated to the standard network protocol circuits 38a and 38b for transmission again on network 15 to output module 16.

Output module 16 may receive output data through a standard network protocol circuit 44a and 44b being similar to standard network protocol circuits 36a and 36b and 38a and 38b. The standard network protocol circuits 44a and 44b provide the data to safety protocol circuits 46a and 46b, which in turn provide them to redundant controllers 48a and 48b. As before, alternatively, the safety protocol may be handled by the controllers 48a and 48b instead. The controllers 48a and 48b communicate by internal bus 34” and in turn provide signals to output interface circuits 50a and 50b which provide the output signals 20a and 20b. The output signals may be connected to the actuator 22 so that outputs must be enabled for the actuator 22 to be powered. In this sense, a default safety state is produced (of no power to the actuator 22) if there is an inconsistency between the signals received by processors 48a and 48b. A change in the wiring to parallel configurations could create a safety state where the actuator is actuated unless both signals received by processors 48a and 48b are not enabled.

Alternatively, and as will be described, a safety state may be enforced by a safety state signal transmitted from the controller 12 or the input module 14 to the microcontrollers 48a and 48b of output module 16, the latter which may respond by producing outputs to output interface circuits 50a and 50b determined by stored values of desired safety states programmed through the configuration terminal 24 as will be described further below.

A bridge circuit 17 per the present invention could use the basic structure shown in the input module 14 but replacing the interface circuitry 28a and 28b of input module 14 with network protocol circuits 38a and 38b and safety protocol circuits of 40a and 40b (where the network protocol circuits 38 and 36 are for different protocols, thereby allowing seamless transmission of safety data per the techniques described below).

Referring now to Fig. 3, specialized redundant input module 14, in the present invention, may be replaced with two standard input modules 14a and 14b, input module 14a holding the equivalent of previously described interface circuitry 28a, microcontroller 30a, safety protocol circuit 32a and standard network protocol circuit 36a; and input module 14b holding the equivalent of interface circuitry 28b, microcontroller 30b, safety protocol circuit 32b, and standard network protocol circuit 36b. In this case, the operation of safety protocol circuits 32a and 32b are implemented in the firmware of the microcontrollers 30a and 30b and effected via messages communicated on the network 15 rather than the internal bus 34.

Likewise, referring to Fig. 4, the redundancy of output module 16 may be implemented by separate output circuits 16a and 16b, output module 16a including the

equivalent of standard network protocol circuit 44, safety protocol circuit 46a, microcontroller 48a, and output interface circuit 50a, with output module 16b including the equivalents of standard network protocol circuit 44 as 44', safety protocol circuit 46b, microcontroller 48b, and output interface circuit 50b. As will be described below, the present invention provides a protocol that is indifferent to the exact parsing of the safety components among physical devices having addresses on the network 15.

Referring now to Figs. 5 and 2, the operation of the safety protocol circuits 32 and standard network protocol circuits 36 in the input circuit is to embed input data 52 from lines 18b within a safety-network protocol 54 implemented both as additional data attached to messages sent on network 15 and in the management of that data as will be described. The safety-network protocol 54 is in turn encapsulated in the standard network protocol 56 for seamless transmission on the network 15.

#### The Safety Network Protocol

Referring now to Figs. 5 and 2, the operation of the safety protocol circuits 32, 40 and 46 in conjunction with the standard network protocol circuits 36, 38 and 44 is to embed I/O data 52 (e.g., from lines 18b) within a safety-network protocol 54 implemented both as additional data attached to I/O data 52 sent on network 15 and in the management of the particulars of transmission of that I/O data 52. The safety-network protocol 54 is in turn encapsulated in the standard network protocol 56 for seamless transmission on the network 15.

The data encapsulated in the safety-network protocol 54 and standard network protocol 56 can then be received (e.g., by the controller 12) and extracted through the successive operation of the standard network protocol circuits 36, 38 and 44 and the safety protocol circuits 32, 40 and 46 to provide the I/O data 52 in its basic state. Note that Fig. 5 is only symbolic of the process and that the safety-network protocol 54 is not simply an encapsulation of the data 52 within for example safety data headers but rather the safety protocol includes timing constraints that may be executed in sequence with the standard network protocol 56 so that the safety-network protocol 54 may operate within the standard network protocol 56 without modification of the network 15 or standard network protocol circuits 36, 38 and 44.

This dual level encapsulation and de-encapsulation is performed for each transmission of I/O data 52 on the network 15 that requires a high level of reliability commensurate with safety systems. For non-safety system data, the standard network protocol 56 may be used

alone without the safety-network protocol 54 for communication with non-safety elements of the industrial control system 10. Because all data transmitted on the network 15 is embedded in the standard network protocol 56, the safety-network protocol 54 will work seamlessly with a variety of networks 15 providing they have data transmission capacity suitable for the I/O data 52 and sufficient in capacity to accept some added safety error detection data 58 of the safety-network protocol 54 as will be described.

#### Safety Message Formatting

Referring now to Fig. 6, a first aspect of the safety-network protocol 54 is that the I/O data 52 is attached to safety error detection data 58 to form a safety message 60 that forms the data provided to the standard network protocol circuits 36, 38 and 44 to produce a network message 61. The safety error detection data 58 may include a sequence count indicating the local order in which the safety message 60 is transmitted with respect to earlier transmissions of safety messages. The sequence count is normally limited in range (0-3) as it is intended, as will be described, to detect the loss of only a single message.

Also appended to the I/O data 52 and part of the safety error detection data 58 is a cyclic redundancy code (CRC) selected in the preferred embodiment to be twelve-bits. The cyclic redundancy code is functionally generated from the I/O data 52 and the sequence count so that an error in the transmission of either of those data elements can be detected when the CRC is recalculated by the receiving device and doesn't match. As is understood in the art, a twelve bit error code will allow the detection of errors with odd numbers of bit errors, all two-bit errors, all burst errors up to twelve bits and 99.951% of burst errors larger than twelve bits, for up to two-thousand and forty seven bits of data of the safety message 60.

The safety message 60 is embedded in the network headers and footers 62 and 64, which vary depending on the standard network protocol 56 of the network 15. Depending on the network 15, the network header and footer 62 and 64 may include a CRC code and sequence count and other similar safety error detection data 58 operating redundantly with the safety error detection data 58. Nevertheless, the safety message 60 includes its own safety error detection data 58 so as to be wholly network-independent to the degree possible.

#### Connected Messaging

As mentioned above, the safety error detection data 58 forms only part of the safety-network protocol 54. The safety-network protocol 54 also includes a configuration step that ensures proper communication under a connected messaging scheme. Referring now to Fig. 9, the communications between the controller 12, input module 14 (or input modules 14a and

14b) and the output module 16 (or output module 16a and 16b) may provide a connected messaging system. As is understood in the art, connected messaging involves opening a connection between pairs of logical devices one that acts as a "producers" of a message and one that acts as a "consumers" of the message. The process of opening the connection reserves bandwidth of the network and reserves necessary processing and buffering resources at the producer and consumer to ensure that data of the connection will be reliably transmitted and received.

The connected messaging protocol may be implemented as part of the safety network protocol 54 or as part of the standard network protocol 56, the latter option limiting somewhat the types of standard networks 15 that may be used. Some standard network protocols that support connected messaging are DeviceNet and Control Net, Ethernet, and ATM.

Referring now to Fig. 9, under a connected messaging protocol, the input module 14 provides two producers 80 opening two connections with two consumers 82 of the controller 12, one for each of the signals 18a and 18b. As a practical matter, these two connections mean that two separate network messages 61 will be sent over the network 15 thus decreasing the chance of loss of both messages.

For the implementation of Fig. 3 with separate input module 14a and 14b, two producers 80 are also provided. Even though the producers 80 are now in different devices (having different addresses on the network 15), the operation of the control program implementing the safety system, above the connection level, need not changed by these changes in implementations. Connected messaging thus makes the safety system largely indifferent to topologies as providing for a natural redundancy over a single network, or bridging or routing across multiple links

Controller 12 likewise includes two producers 80 exchanging data with consumers 82 either in a single output module 16 per Fig. 2 or in separate output module 16a and 16b per the embodiment of Fig. 4. Two arrows are shown between each producer 80 and consumer 82 indicating the paring of each message with an acknowledgment message under the safety protocol 54 as will be described below, per Fig. 9.

The bridge circuit 17, not shown in Fig. 9, but as described above, would implement four consumers and four producers (two for each network side) as will be understood to those of ordinary skill in the art.

#### Safety Configuration Data and Protocol

Referring now to Fig. 10, the safety protocol more generally includes an initialization state, of which the first step is developing configuration data as indicated by process block 66.

The configuration process involves developing configuration data at the configuration terminal 24 and ensuring that accurate copies of that configuration data are at each of the input module 14, the controller 12, and the output module 16. The configuration data is unique to each connection, provides essential components of the safety protocol, and identifies intercommunicating parties so as to reduce the possibility of improper connections injecting spurious data into the safety system. This is particularly important in allowing mixing of systems components observing the safety network protocol 54 with standard components observing only the standard network protocol. Devices may support multiple connections, in which case multiple configuration data specific to each connection will be used.

Generally, the configuration data include data uniquely identifying the particular device of the input module 14, the controller 12, and the output module 16 holding the configuration data, and particularly the serial number of that device. The serial number is a unique and immutable part of the physical devices and thus together with an internal address of the logical devices within the physical device (which may establish independent connections) the serial number provides each connection with a unique identity eliminating the possibility of crossed connections between different devices once the configuration data is properly disseminated. To augment the serial number, the configuration data may also include a vendor identification number, a device code, a product code, major revision, minor revision, as well as network data including the logical, physical address of the device, all known in the art and identifying the particular device. Similarly, the configuration data within a device may include the serial number of the device to which it is connected.

As mentioned, the connection data may also include data necessary for the implementation of the other aspects of the safety protocol as are yet to be described, including variables of "periodic time interval", "reply timer interval", "filter count", and "retry limit". The configuration data also includes the safety state to which the device will revert in the case of network error and a list of related I/O points indicating other I/O points (related to other connections), which should revert to the safety state if the present connection has an error. This later feature allows selective and intelligent disabling of the safety system upon a communication error as will be described. As will be evident from context, some of

this data, for example, data related to how particular devices should respond to a failure of any one device (e.g., the list of related I/O points, is dependant on the devices and their application and the system programmer must develop this data on an application specific basis.

Referring to Fig. 7, configuration data held within the configuration terminal 24 is sent to each of the input module 14, the controller 12, and the output module 16 as messages 66a, 66b and 66c.

The receiving input module 14, the controller 12, and the output module 16 store the configuration and respond with the same configuration message but changed to a one's complement form (being simply a different binary coding (the inversion)) of the configuration data received. This one's complement message is returned by messages 66d, 66e, and 66f from the respective input module 14, the controller 12, and the output module 16. If the configurations of messages 66a, 66b and 66c exactly match (after complementing) configuration data of messages 66d, 66e and 66f, the configuration was successful.

The configuration data may be shown to a human operator for confirmation. If the operator finds that the configuration is correct, the configuration is applied as indicated by process 68 shown in Fig. 10 through messages 68a, 68b and 68c from the configuration terminal 24 to the respective input module 14, the controller 12, and the output module 16. The devices must acknowledge these messages via messages 68d, 68e and 68f within a predetermined time interval or the configuration will be cleared and no configuration will be considered to have occurred. The configuration data of messages 66 and 68 may be sent using only the standard network protocol 56.

Once the configuration is complete, the safety protocol enters a start-up phase shown generally in Figs. 8 and 10. During the start-up phase, the necessary safety connections are established and the configuration data is used to verify that the connections expected are those which are in fact made. The purpose of the start-up portion of the configuration is to prevent erroneous connections from being opened between: (1) devices in the safety system and other erroneous devices in the safety system, and (2) devices in the safety system and other devices not in the safety system in a mixed system.

In this start-up process, indicated by process block 70 of Fig. 10, the connections are confirmed from the controller 12 to the input module 14 and the output module 16. In particular, the producers 80 in controller 12 (shown in Fig. 9) send out open connection messages 70a and 70b to the input module 14 and the output module 16, respectively. The



appropriate consumers 82 respond with connection acknowledgment message 70c and 70d, respectively. The producers 80 in controller 12 and input module 14 then send the configuration data to the consumer 82 in the controller 12 as indicated by messages 70e and 70f. The controller's consumers 82 check to see that the configuration data matches their configuration data and then send acknowledgment messages 70f and 70g acknowledging that match. At messages 72a and 72b, conventional I/O data may then commence to be sent.

Referring again to Fig. 10, the data 72a and 72b will be transmitted according to the portions of the safety protocol indicated by process blocks 72 involving formation of the safety message 60 incorporating safety error detection data 58 into the network message 61 as has been described above, and according to message handling protocols 74 operating independent of and in conjunction with the content of the safety message 60 which will now be discussed.

#### Message Handling Safety Protocols

##### (1) Normal Transmission

Referring generally to Figs. 10 and 11, the message handling protocols 74 provide for message time measurements and respond to errors in the safety error detection data 58 during run-time. These message-handling protocols 74 are implemented in the safety protocol circuits 32, 40 and 46 or may be implemented in software and are different for producers and consumers.

Referring now to Figs. 11 and 17 for a normal, run-time transmission, the producer 80 upon run-time will send safety messages 84 (encapsulated in the standard network message 61 per safety message 60 as has been described above) to the consumer 82 per Fig. 11. This sending is indicated generally in Fig. 17. Immediately prior to sending the message 84, a periodic timer is started per process block 89 and a reply timer is started at the moment the message 84 is transmitted per process block 91. The periodic timer interval 86 is longer than the reply timer interval 88 as set in the configuration process described above.

Referring now to Fig. 9, 11 and 18, the consumer 82 prior to receiving the message 84 is continually checking to see if the periodic time interval 86' of its own periodic timer (started at the consumer's receipt of the last message 84) has expired as indicated in decision block 92. The periodic timer value 86' is generally greater than periodic timer value 86.

If the periodic timer has expired, a failure is indicated and the program proceeds to process block 134, a safety state, as will be described below.

If timer value 86 has not expired, then at decision block 90, the consumer 82 checks to see if the message 84 has arrived. If no message 84 has arrived the program proceeds back to decision block 92 to again check if the periodic timer 86 has expired.

Assuming that a message 84 has arrived prior to expiration of the periodic timer 86, then the program proceeds to decision block 112 to check the CRC of the message 84.

Assuming that the CRC is correct, the program proceeds to decision block 96 and checks to make sure that the sequence count is one greater than the sequence count of the last message received.

If the sequence count is correct, then the program proceeds to process block 94 and the periodic timer 86 is reset. At process block 95, the data is applied, for example, to an output or to update variables, and then at process block 98, an acknowledgment message 100 is returned to the producer 80.

Referring again to Fig. 17, the producer 80 receiving the acknowledge message at decision block 102, proceeds to decision block 106 to determine if the periodic timer 86 has expired.

Assuming that the periodic timer has not expired, the program proceeds to decision block 124 to check the CRC of the acknowledgement message 100. The cyclic redundancy code should match the data of the safety message 60 transmitted.

Again, assuming that the CRC is correct, the program proceeds to decision block 125 to determine whether the sequence count of the acknowledgment message 100 matches that of the message 84 that was sent.

If so, then at decision block 127, the data sent in message 84 is compared to the data of the acknowledgement message 100. If there is a match, then the program proceeds to decision block 129 where it loops until the periodic timer has expired, and then proceeds to process block 110 to prepare a new message 84.

This process is repeated for multiple transmissions of safety messages 84 and acknowledgement messages 100.

## (2) Message Received but Corrupted

Referring now to Fig. 11 in one potential error the safety message 84 is corrupted for example by electromagnetic interference 85. In this case a message is received at the consumer 82, as indicated by Fig. 18 per process block 90, within the periodic timer value 86' as measured by process block 92 however there is an error in the CRC data as determined by

decision block 112. In this case, the program proceeds to process block 114 and no action is taken and in particular no acknowledgement message 100 is returned.

Referring to Fig. 17, in this case there will be no acknowledgment message 100 received by the producer 80 at process block 102. The program proceeds to decision block 116 to determine if the periodic time interval 86 has expired. If so, the failure is indicated and the program proceeds to the safety state of process block 126.

If the periodic timer interval 86 has not expired, the program will proceed to decision block 118 to see if the shorter reply timer interval 88 has expired. If not, the program will loop back to process block 102. If so, the program will proceed to process block 120 to check if the retry limit has been exceeded. Initially this may not be the case and the program will proceed to process block 122 and a repeat message 84' having the same sequence count will be sent at process block 84, as also indicated by Fig. 12. If the retry limit has been exceeded, the program proceeds to the safety state 126.

This repeat message 84' will be received at the consumer 82 as indicated by process block 90 of Fig. 18 and assuming that it is correct it and that it has arrived within the periodic timer interval 86' based on the previous non-erroneous message, this message 84' results in the sending of an acknowledgment message 100 at process block 98 per the steps described above.

Typically, if only one missed transmission has occurred, the acknowledgment message 100 will occur within the periodic timer interval 86 of the producer and messages will be continued to be exchanged normally as has been previously described with respect to Fig. 11.

### (3) Message Not Received

Referring now to Fig. 13, in the previous example, the safety message 84 arrived at the consumer 82 to be detected, albeit with errors. It is possible that the safety message 84 will not arrive at the consumer 82 either as a result of such extreme interference that it is not recognizable as a message under low level network protocols, or as a result of component failures between the producer and the consumer of an intermittent nature. Under this situation, the producer 80 sends the message 84 but the consumer does not receive a message at process block 90 of Fig. 18.

The "no action" block 114 of Fig. 18 of the consumer (as described above) is thus not encountered but the result is in any case the same: the consumer 82 takes no action.

Thus, as described previously with respect to Fig. 12 at the expiration of the reply timer at the producer 80, the producer 80 will produce a second message 84' which if received will result in an acknowledgment message 100 initiating a string of normal communications.

#### (4) Acknowledgement Message Received but Corrupted

Referring now to Fig. 14 the safety message 84 may successfully reach the consumer 82 with no errors but the acknowledgement message 100 may have errors introduced by electromagnetic interference 85. In this case the producer 80 reacts as shown in Fig. 17 by decision block 106 to detect a receipt of an acknowledgment message 100 within the periodic timer interval 86. But there is an error in the data of the acknowledgment message 100.

If the CRC is correct as determined by decision block 124 and it is the sequence count that is wrong per process block 124, then the program enters the safety state 126 in which outputs and inputs of the consumer 82 are set to a predefined safety state of the configuration data. Similarly, if the sequence count is correct but the acknowledgement data does not match per decision block 127, the program proceeds to the safety state 126. If the consumer 82 is the controller 12 messages may be sent to other I/O devices, indicated in the configuration data signaling them to move to the safety state as well.

Assuming at process block 124 that the CRC code does not match the safety message 60. indicating a corruption in the safety message rather than an erroneous duplicate message, the program proceeds to decision block 118 to see if the reply timer has expired as described above. When the reply timer expires the program proceeds to process block 120 as described above and checks the retry counter to see if the retry limit has been exceeded. If so, the program proceeds to the safety state 126 however often this will not have occurred and the program proceeds to process block 122 and a retry message 84' is prepared as indicated in Fig. 14.

Assuming this retry message evokes a non-corrupted acknowledgment message 100' communication continues in normal fashion.

#### (5) Acknowledgement Message Not Received

Referring now to Fig. 15 it is possible that the acknowledgment message 100 is lost completely either through interference or temporary communication failure. In that case, as has been previously described, a duplicate message 84 will be sent from the producer 80 however the sequence count will be identical to the sequence count of a message 84 previously received by the consumer 82. In this case as shown in Fig. 18 at process block

112 the CRC will be correct but as tested at subsequent decision block 96 the sequence code will be wrong. The program, in this case, proceeds to process block 130 to check if the sequence code is one less than that expected. If not the program proceeds to the safety state 134. If so, however, the consumer 82 must conclude that the acknowledgment message 100 was lost and an acknowledgment of the previous message is sent again by the consumer at process block 132.

(6) No Messages Received

Finally as shown in Fig. 15 the producer may be unable to connect with the consumer within the periodic interval 86' of the consumer. In that case the program proceeds to the safety state 134 directly from decision block 92 as shown in Fig. 18.

The above description has been that of a preferred embodiment of the present invention, it will occur to those that practice the art that many modifications may be made without departing from the spirit and scope of the invention. In order to apprise the public of the various embodiments that may fall within the scope of the invention, the following claims are made.

## CLAIMS

WE CLAIM:

1. A network-independent, high-reliability communications system for an industrial controller using a standard serial communications network, the communications system comprising:

5 a first I/O communications circuit receiving I/O data for control of an industrial process;

a first network-independent protocol device receiving the I/O data and formatting it for transmission under a network-independent protocol to produce high-reliability formatted data formatted to reduce undetected transmission loop errors;

10 a first standard network protocol device receiving the high-reliability formatted data and further formatting it for transmission under a protocol of the standard serial communications network, to produce doubly-formatted data for transmission on the standard serial communications network, the protocol of the standard serial communications network also formatting data to reduce undetected transmission loop errors;

15 a second standard network-protocol device receiving the doubly-formatted data from the standard serial communications network and extracting the high-reliability formatted data according to the protocol of the standard serial communications network;

a second network-independent protocol device receiving the high-reliability formatted data and extracting the I/O data; and

20 a second I/O communications circuit receiving I/O data for control of an industrial process from the second network-independent protocol device;

whereby high-reliability transmissions may be simply obtained on an arbitrary standard serial communications network protocol.

2. The industrial controller of claim 1 wherein the first and second I/O communications circuits are selected from the group consisting of an industrial controller, an input circuit for an industrial controller, a bridge, and an output circuit for an industrial controller.

3. The industrial controller of claim 1 wherein the first network-independent protocol device formats the I/O data by adding error detection data consisting of: a cyclic redundancy code related to the I/O data and a sequence count related to a local order of transmission of the I/O data with respect to other I/O data being transmitted.

4. The industrial controller of claim 1 wherein the second network-independent protocol device further generates an acknowledgment message upon receipt of the I/O data and formats it under the network-independent protocol to produce a high-reliability formatted acknowledgment data;

5 and wherein the second standard network protocol device receives the high-reliability formatted acknowledgment data and further formats it for transmission under the protocol of the standard serial communications network, to produce doubly-formatted acknowledgment data for transmission on the standard serial communications network;

10 and wherein the first standard network-protocol device receiving the doubly-formatted acknowledgment data from the standard serial communications network and extracts the high-reliability formatted acknowledgment data according to the protocol of the standard serial communications network;

15 and wherein the first network-independent protocol device receiving the high-reliability formatted acknowledgment data checks the data to detect transmission loop errors.

5. The industrial controller of claim 4 wherein the acknowledgment data includes the I/O data and the first network-independent protocol device detects errors by comparing the I/O data to the acknowledgment data.

6. The industrial controller of claim 1 wherein the first network-independent protocol device operates to start a timer upon receipt of the I/O data and wherein the first network-independent protocol device detects errors by checking a time on the timer against an allowable time upon receipt of the acknowledgment message.

7. The industrial controller of claim 1 wherein the first network-independent protocol device transmits I/O data on a regular interval and wherein the second network-independent protocol device detects errors by comparing the time at which the last I/O data was received against the time interval.

8. The industrial controller of claim 1 wherein the second network-independent protocol device evaluates the high-reliability formatted data to detect transmission loop errors of the I/O data and upon the detection of an error for I/O data assume a default safety state of the I/O data.

9. The industrial controller of claim 4 wherein the first network-independent protocol device evaluates the high-reliability formatted data to detect transmission loop errors of the I/O data and upon the detection of an error for I/O data assume a default safety state of the I/O data.

10. The industrial controller of claim 1 wherein the standard serial communications network is selected from the group of networks consisting of Ethernet, DeviceNet, ControlNet, Fire Wire and Field Bus.

11. A method of providing a high-reliability communications system for an industrial controller using a standard serial communications network, the communications system comprising the steps of:

(a) receiving I/O data for control of an industrial process at a first I/O communications circuit;

(b) formatting the received I/O data for transmission under a network-independent protocol at a first standard network protocol device to produce high-reliability formatted data formatted to reduce undetected transmission loop errors;

(c) receiving the high-reliability formatted data at a first standard network protocol device and further formatting it for transmission under a protocol of the standard serial communications network, to produce doubly-formatted data for transmission on the standard serial communications network, the protocol of the standard serial communications network also formatting data to reduce transmission loop errors;

(d) receiving the doubly-formatted data from the standard serial communications network at a second standard network-protocol device and extracting the high-reliability formatted data according to the protocol of the standard serial communications network;

(e) receiving the high-reliability formatted data at a second network-independent protocol device and extracting the I/O data; and

(f) receiving I/O data for control of an industrial process from the second network-independent protocol device at a second I/O communications circuit;



whereby high-reliability transmissions may be simply obtained on an arbitrary standard serial communications network protocol.

12. The method of claim 11 wherein at step (b) the first network-independent protocol device formats the I/O data by adding error detection data selected from the group consisting of: a cyclic redundancy code related to the I/O data and a sequence count related to a local order of transmission of the I/O data with respect to other I/O data being transmitted.

13. The method of claim 11 including the further steps of:

(e) generating a reply message by the second network-independent protocol device upon receipt of the I/O data formatted under the network-independent protocol to produce a high-reliability formatted acknowledgment data;

(f) receiving the high-reliability formatted acknowledgment data at the second standard network protocol device and further formatting it for transmission under the protocol of the standard serial communications network, to produce doubly-formatted acknowledgment data for transmission on the standard serial communications network;

(g) receiving the doubly-formatted acknowledgment data from the standard serial communications network at the first standard network-protocol device and extracting the high-reliability formatted acknowledgment data according to the protocol of the standard serial communications network; and

(h) receiving the high-reliability formatted acknowledgment data at the first network-independent protocol device to detect transmission loop errors.

14. The method of claim 13 wherein the acknowledgment data reflects the I/O data and wherein at step (h) the first network-independent protocol device detects errors by comparing the I/O data to the acknowledgment data.

15. The method of claim 11 wherein at step (b) the first network-independent protocol device starts a timer upon receipt of the I/O data and wherein at step (h) the first network-independent protocol device detects errors by checking a time on the timer upon receipt of the acknowledgment message.

16. The method of claim 11 wherein at step (b) the first network-independent protocol device transmits I/O data on a regular interval and wherein at step (e) the second network-independent protocol device detects errors by comparing the time at which the last I/O data was received against the time interval.

17. The method of claim 11 wherein at step (e) the second network-independent protocol device uses the formatting of the first network-independent protocol device to detect transmission loop error in transmission of the I/O data, and upon the detection of an error for I/O data to assume a default safety state of the I/O data.

18. The method of claim 13 wherein the first network-independent protocol device evaluates the high-reliability formatted data to detect transmission loop errors of the I/O data and upon the detection of an error for I/O data assume a default safety state of the I/O data.

19. The method of claim 11 wherein the standard serial communications network is selected from the group of networks consisting of Ethernet, DeviceNet, ControlNet, Fire Wire and Field Bus.

## ABSTRACT OF THE INVENTION

A highly reliable industrial control system is produced using a network running a standard serial protocol. A safety protocol is embedded within the standard serial protocol by adding to special error detecting data redundant with the protocol of the standard serial network. In addition an overarching protocol involving timing of messages is imposed to provide the necessary level of reliability in the standard serial network. This approach allows the safety protocol to be used with a wide variety of commercially available serial communication standards without modification of the media or the specialized integrated circuits used for that communication. Safety protocol may be implemented in an additional level for integrated circuits or through firmware changes in programmable aspects of the industrial controller components.

MSWORD/MKE/4586033

FIG. 1

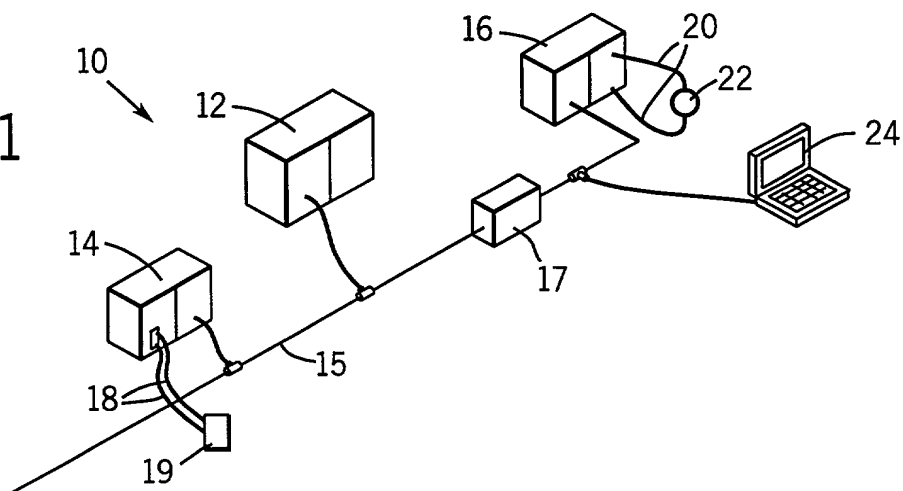


FIG. 2

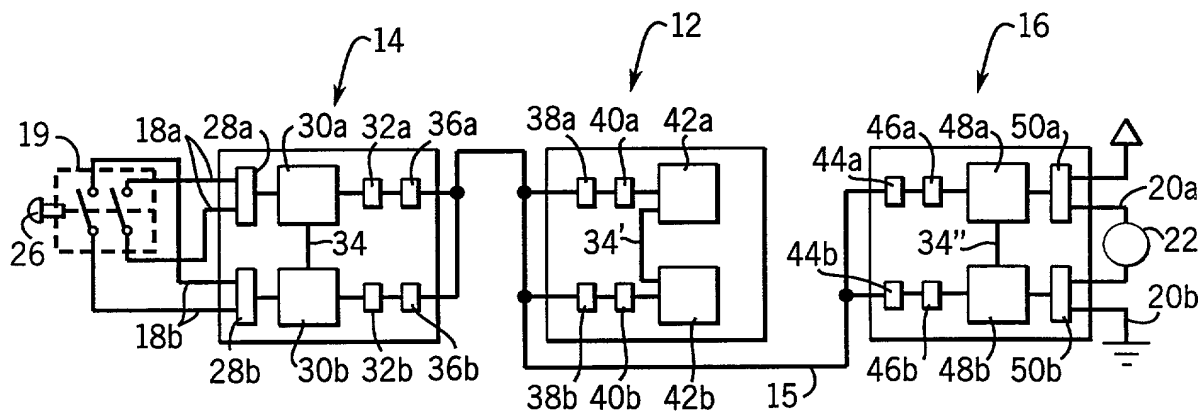


FIG. 3

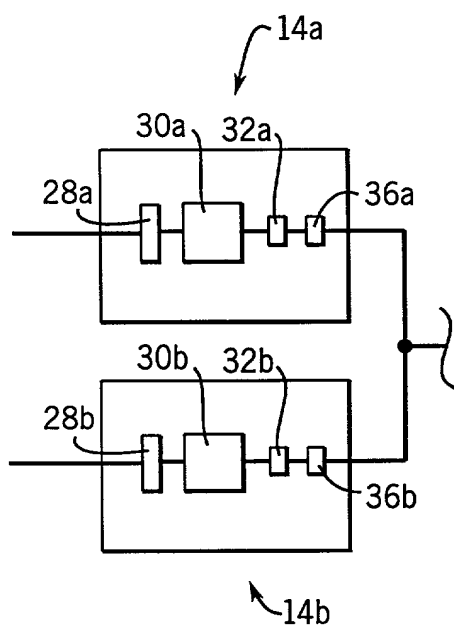
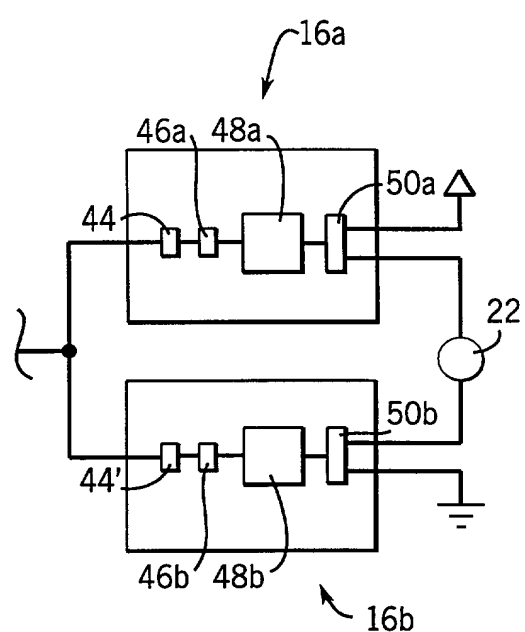


FIG. 4



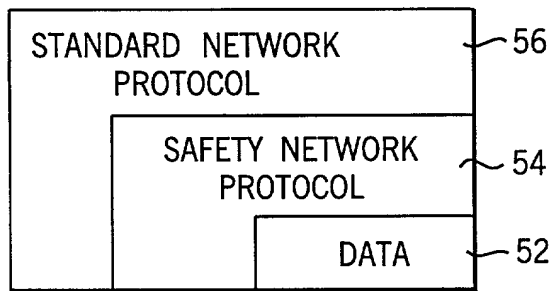


FIG. 5

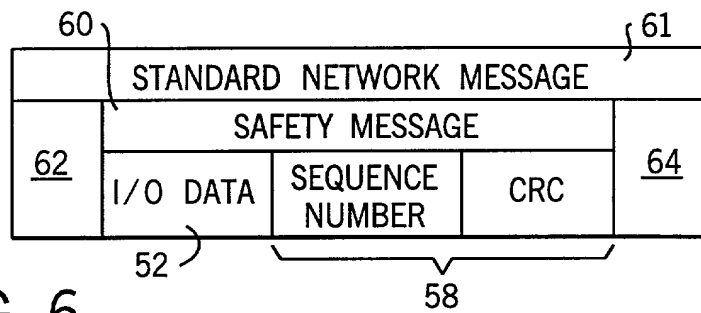


FIG. 6

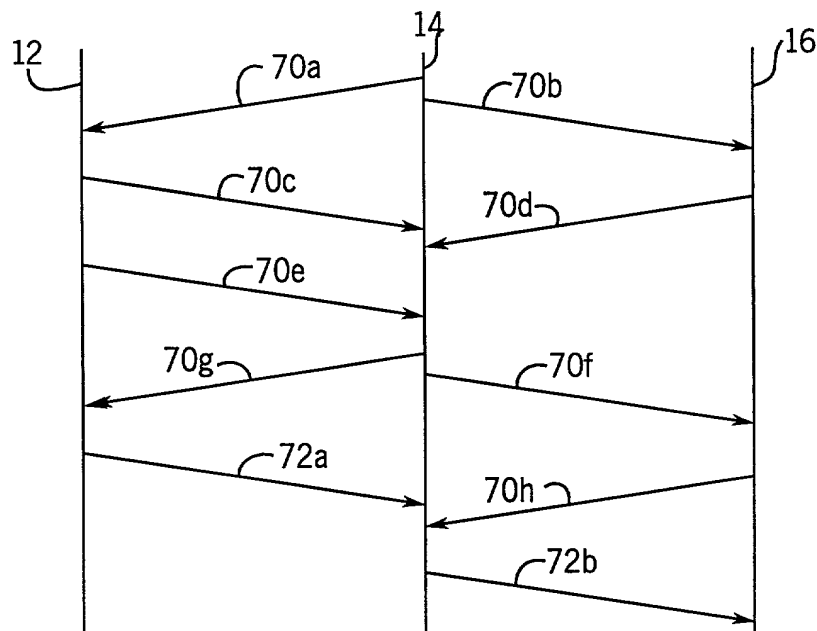
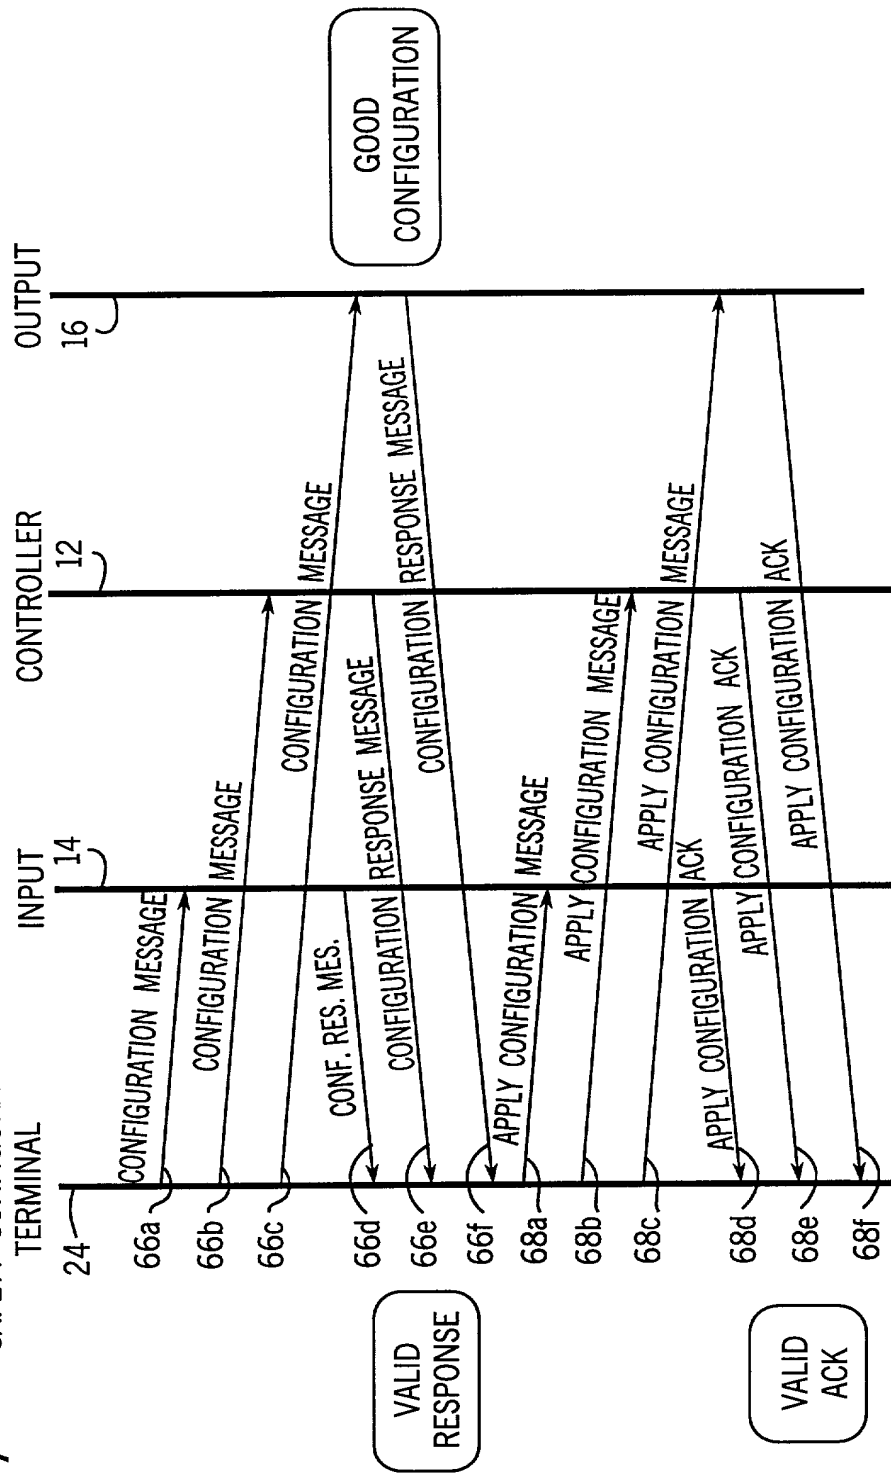


FIG. 8

FIG. 7 SAFETY CONFIGURATION



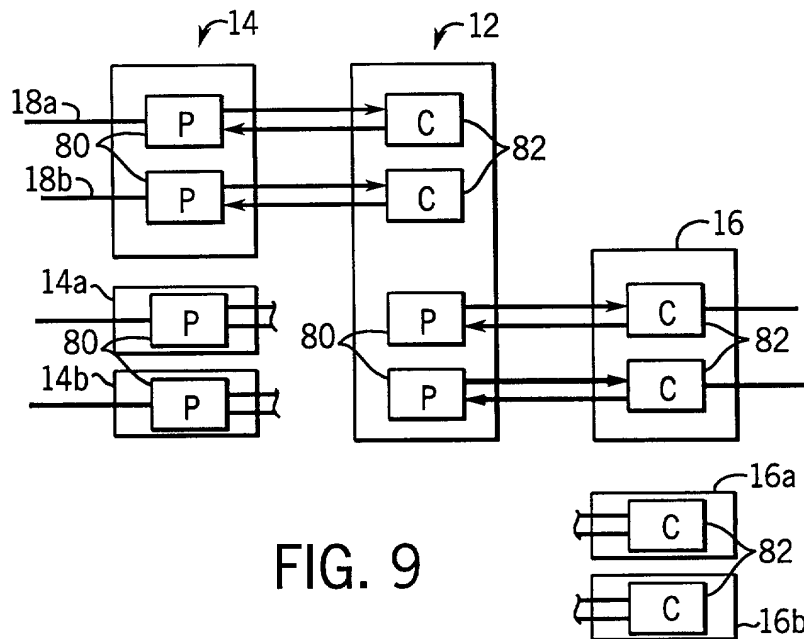


FIG. 9

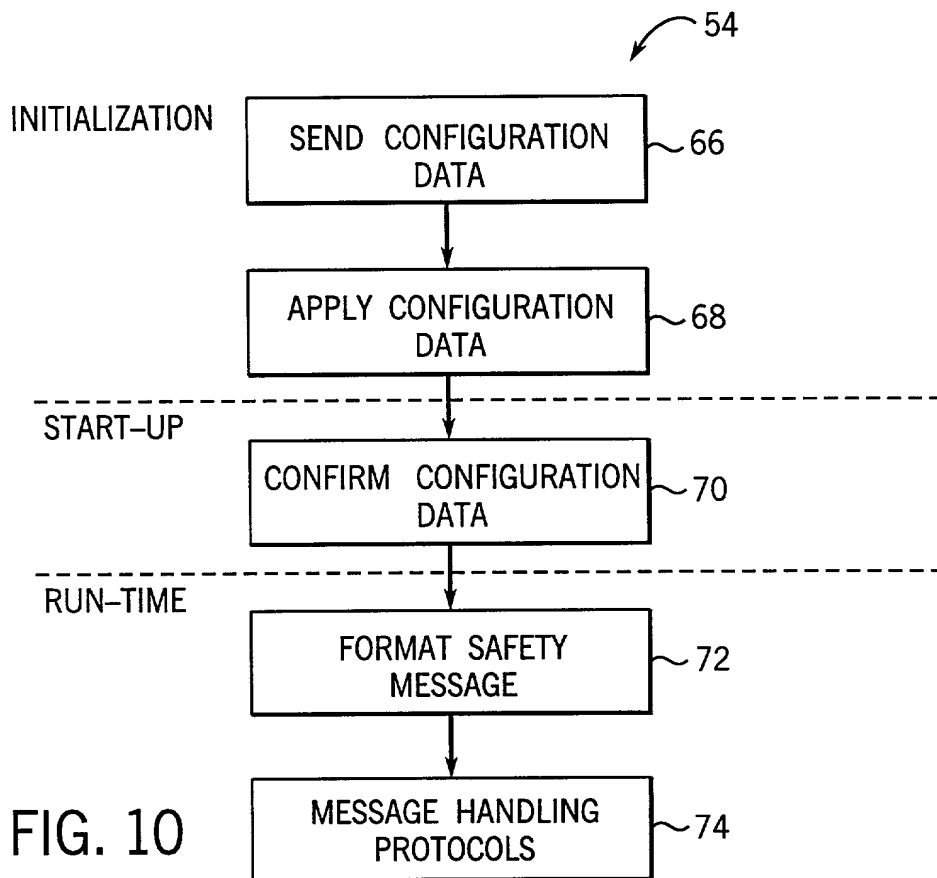
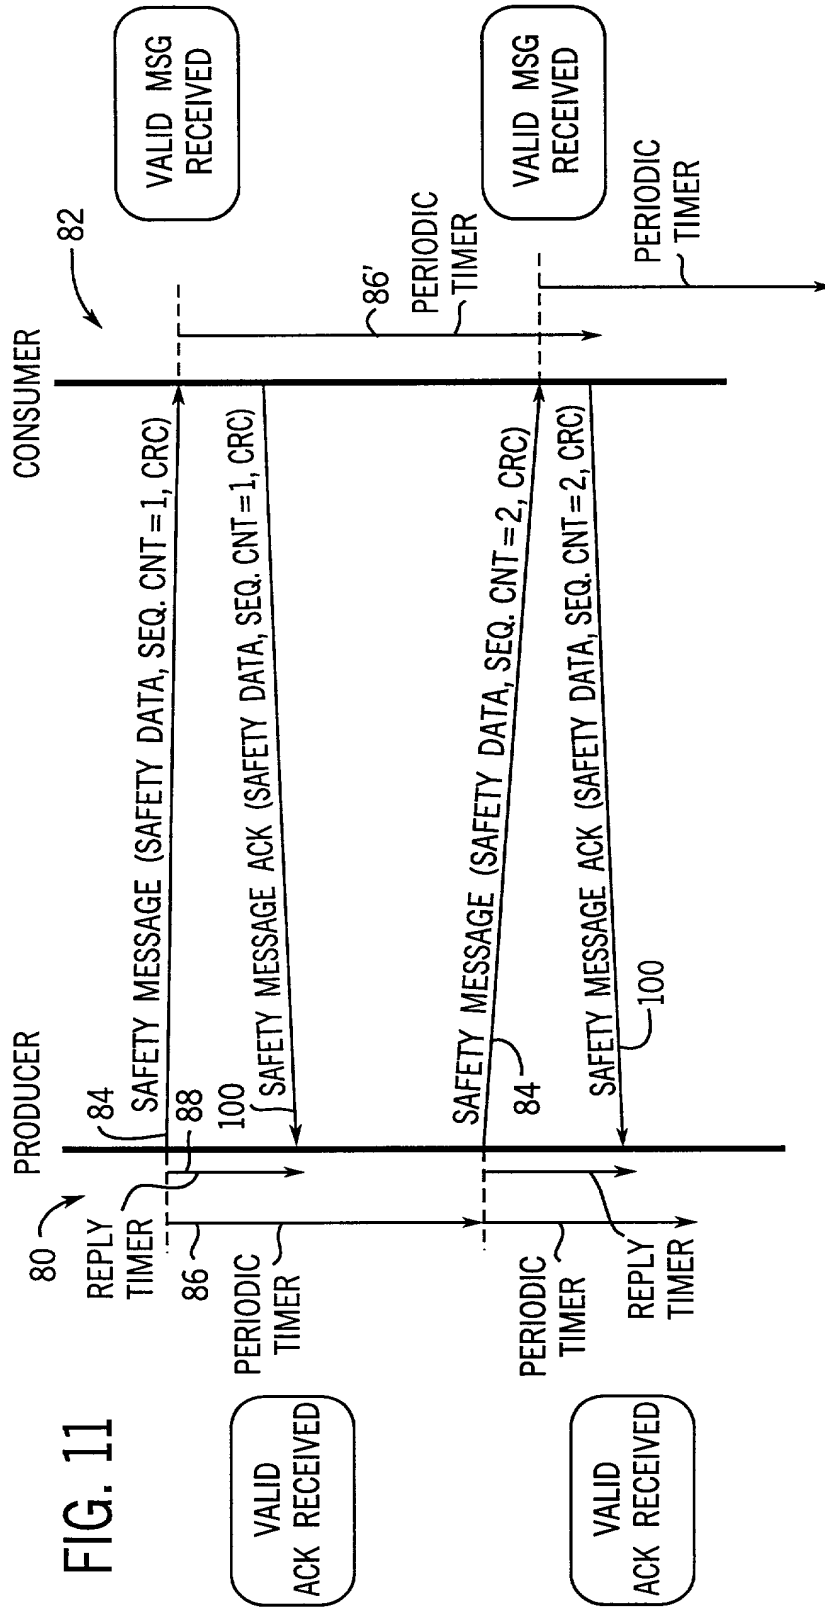


FIG. 10





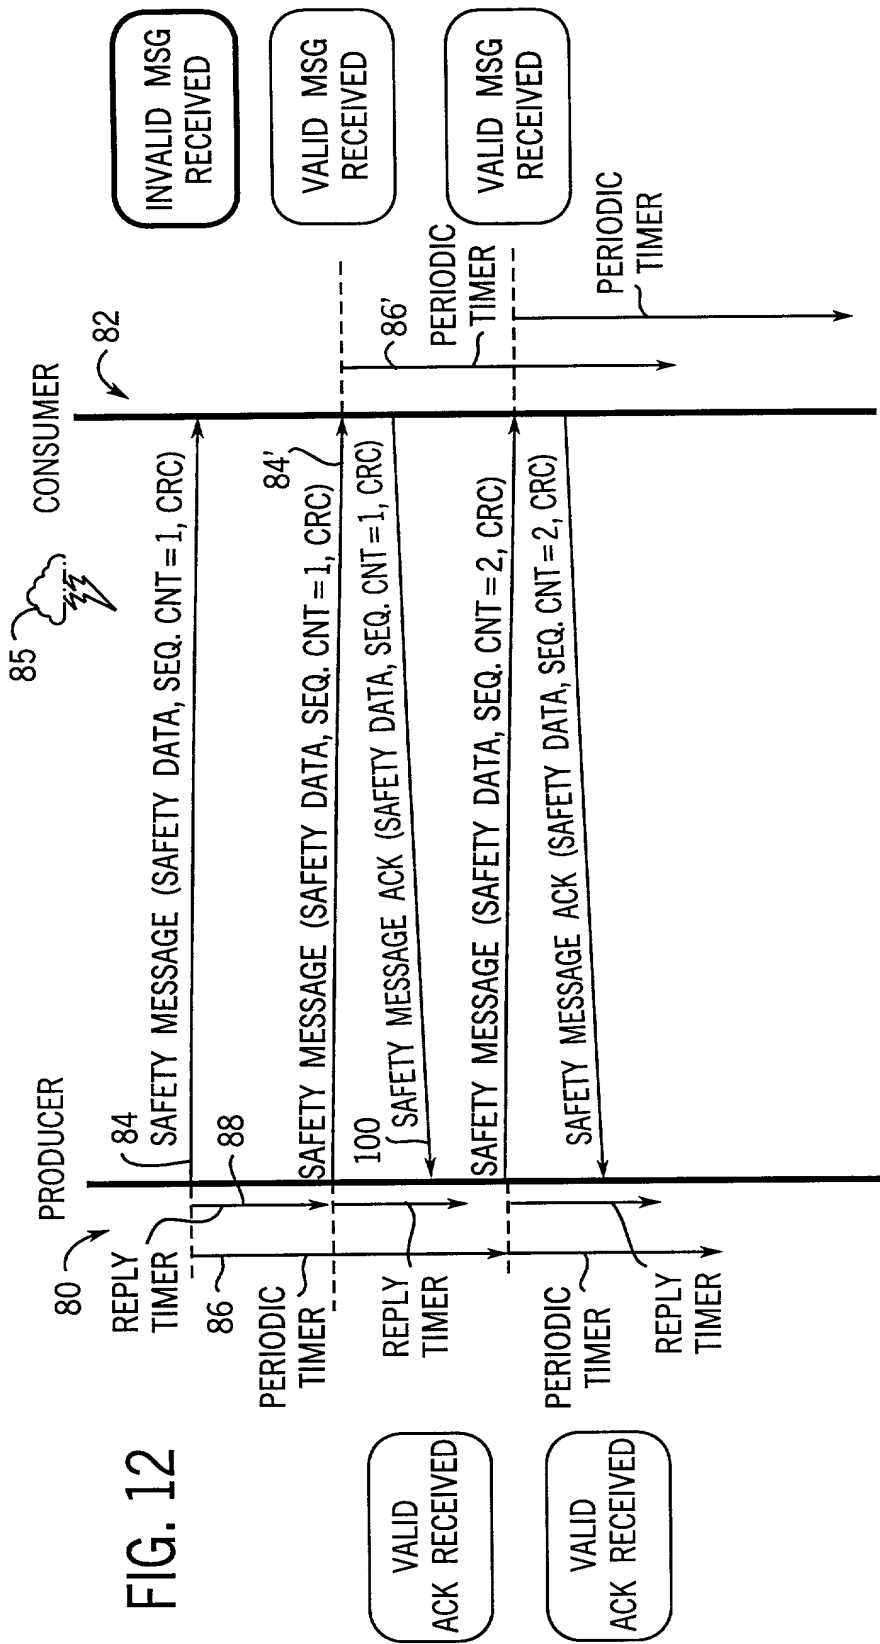




FIG. 14

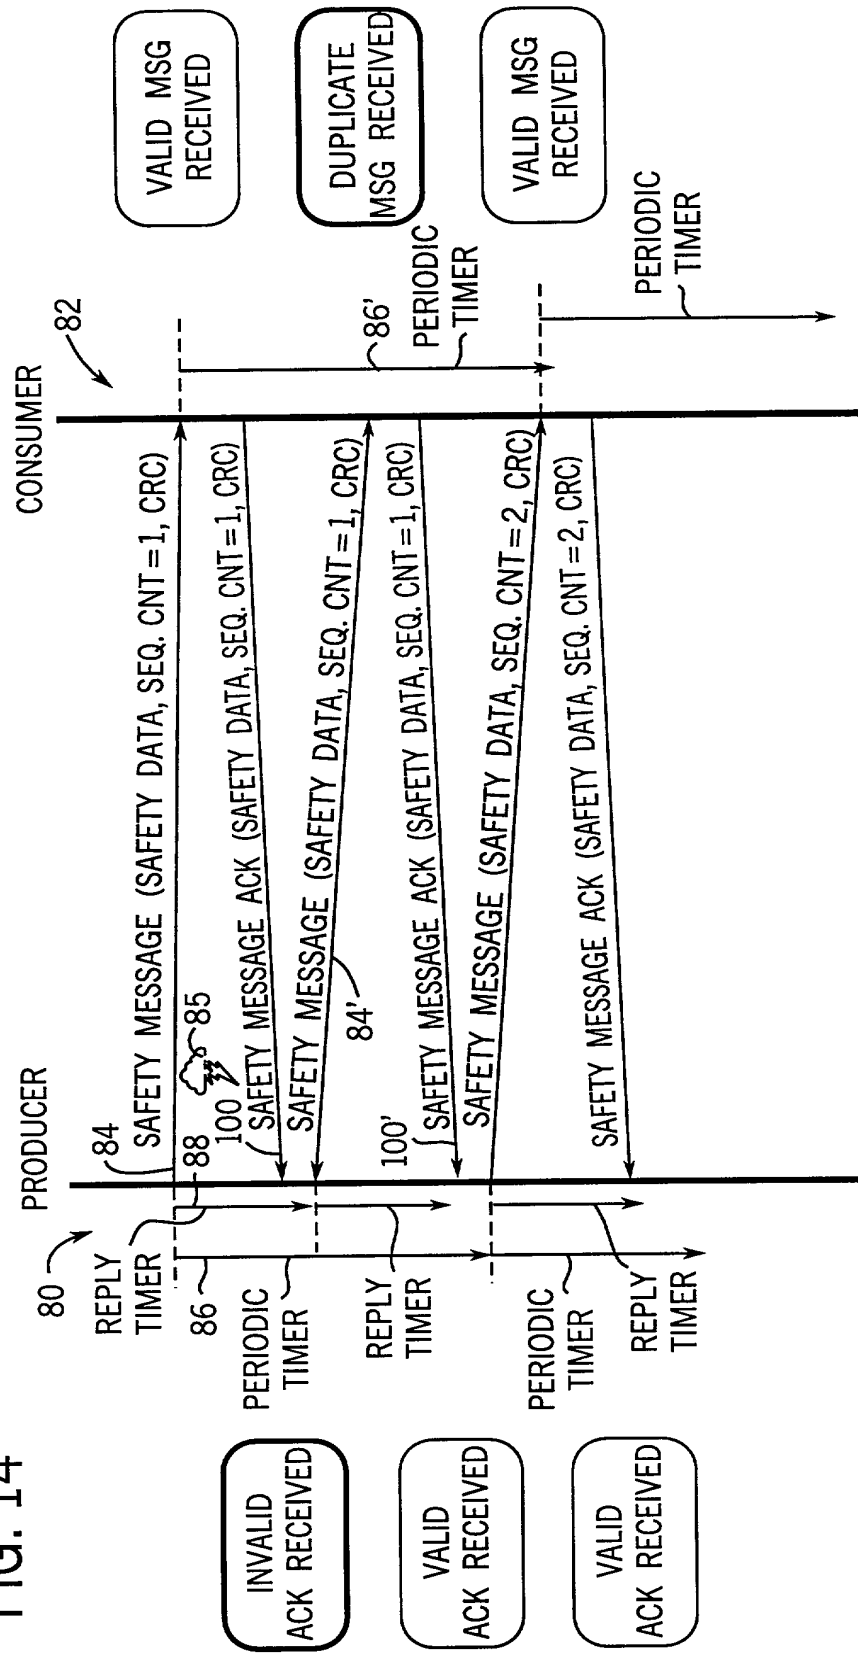


FIG. 15

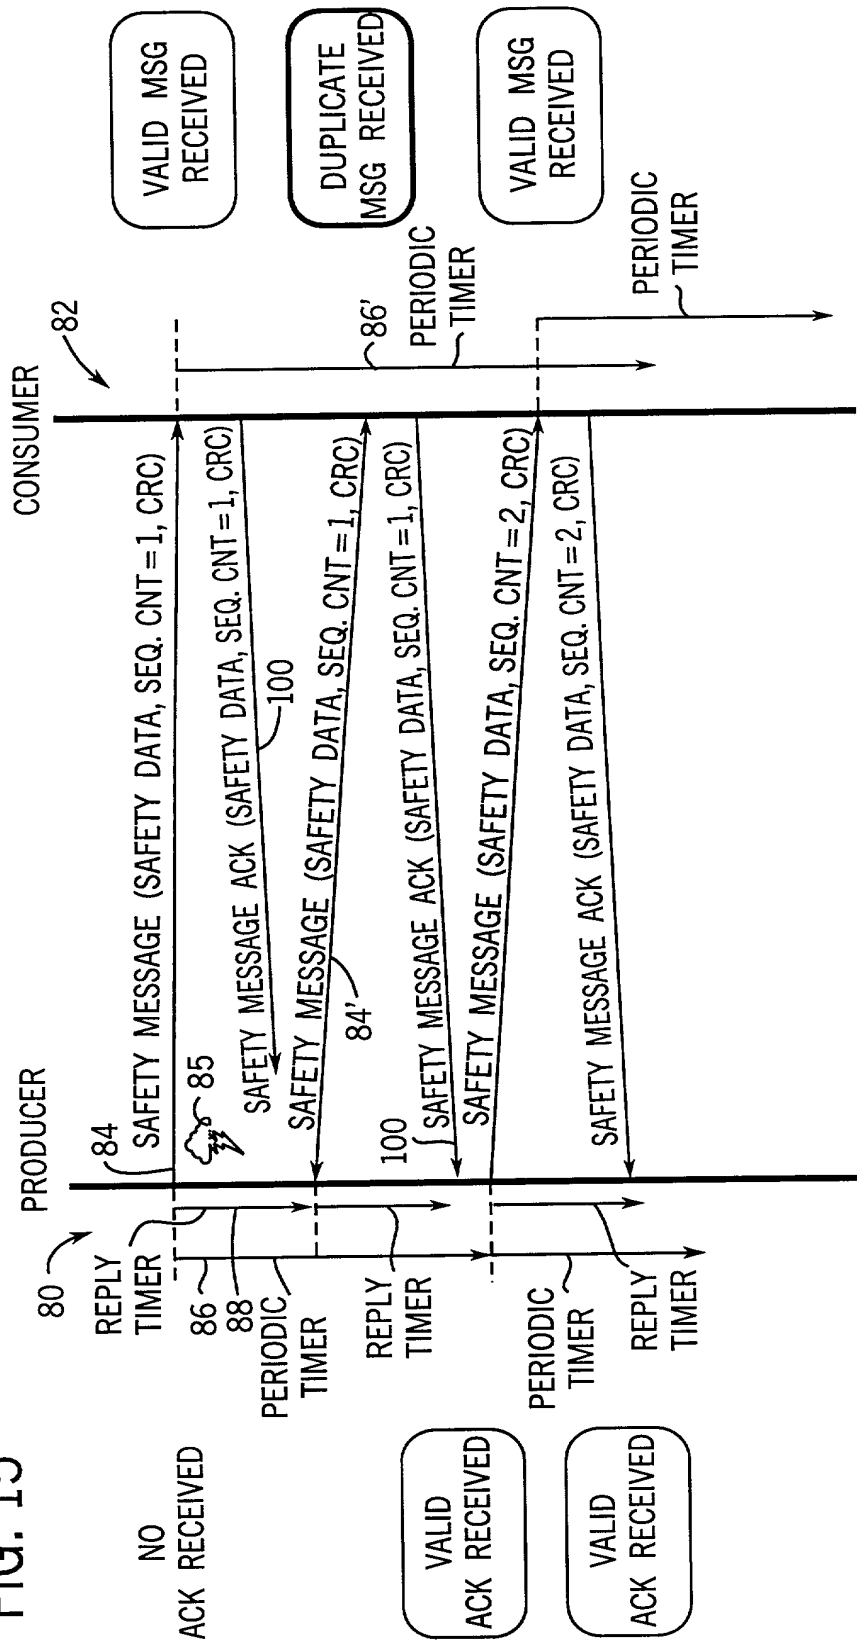




FIG. 17


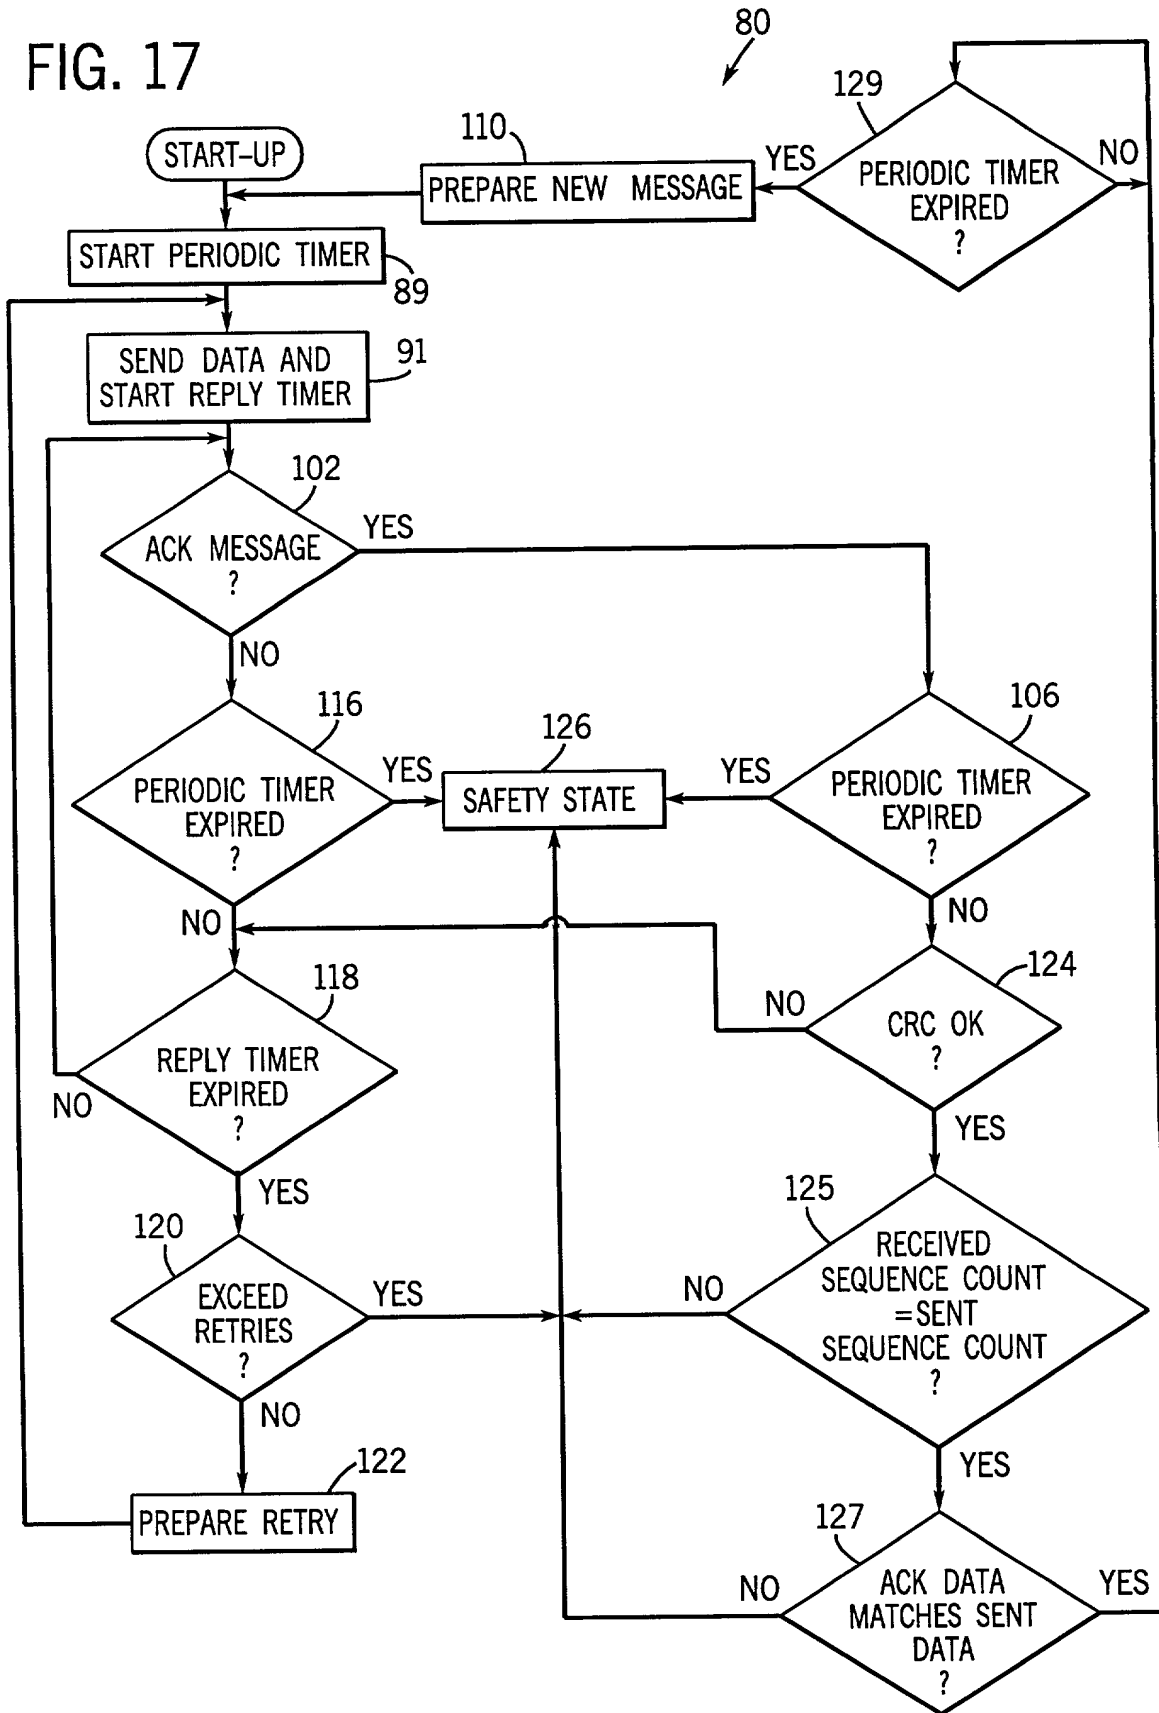


FIG. 18

82

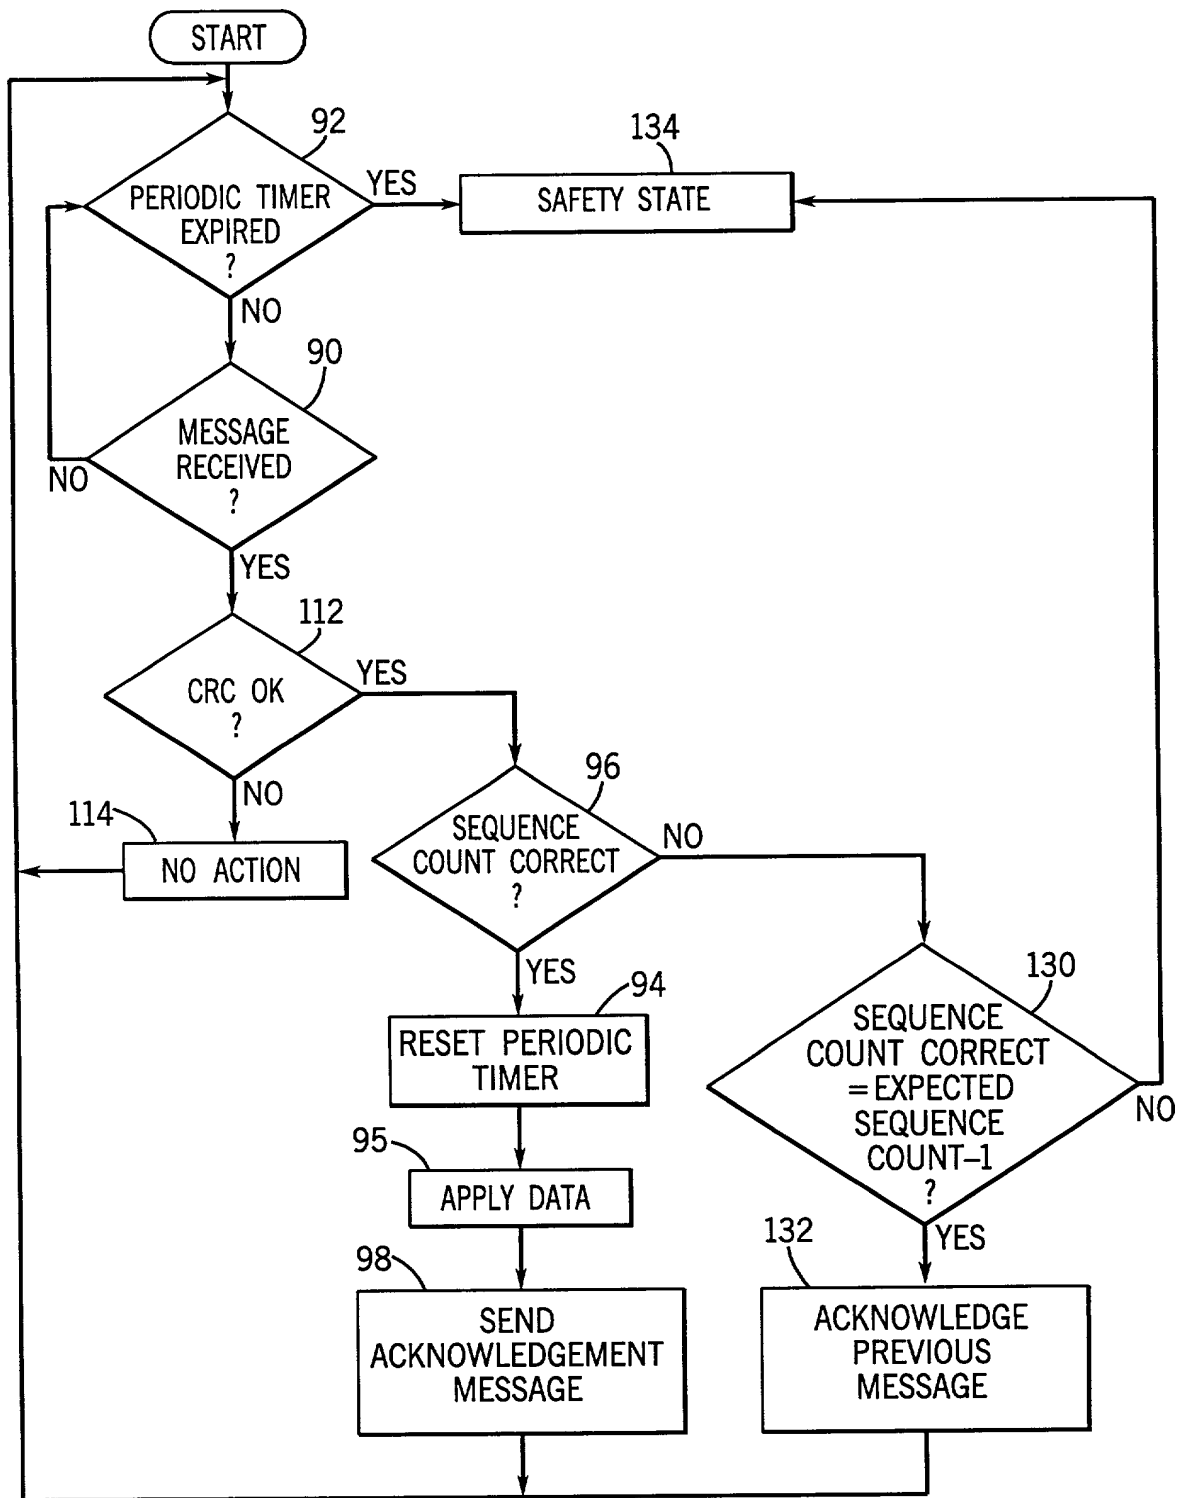

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **NETWORK INDEPENDENT SAFETY PROTOCOL FOR INDUSTRIAL CONROLLER**

the specification of which:

(check one)                    ☒ [ X ] is attached hereto  
    ☐ [ ] was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_  
    and was amended on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability in accordance with Title 37, Code of Federal Regulation, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

_____	_____	_____
(Application No.)	(Country)	(Filing Date)

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below

60/171,439	US	12/22/1999
(Application No.)	(Country)	(Filing Date)

I hereby claim the benefit under Title 35, U.S.C., § 120 of any United States application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status-patented, pending, abandoned)



I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

<u>Keith M. Baxter - Reg. No. 31,233</u>	<u>Michael A. Jaskolski - Reg. No. 37,551</u>
<u>William R. Walbrun - Reg. No. 37,464</u>	<u>Steven J. Wietrzny - Reg. No. 44,402</u>
<u>Alexander M. Gerasimow Reg. No. 28,610</u>	
<u>John J. Horn - Reg. No. 28,803</u>	

Address all telephone calls to :

John J. Horn at telephone number (414) 382-3561

Address all correspondence to :

Rockwell Technologies, LLC  
Attention: John J Horn  
Patent Dept./704P Floor 8 T-29  
1201 South Second Street  
Milwaukee, Wisconsin 53204

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of first inventor Kerry W. Vandesteeg

Inventor's Signature *Kerry W. Vandesteeg* Date 8/27/2000  
Citizenship U.S.  
Residence Chagrin Falls, Ohio

Post Office Address 75 West Bellmeadow, Chagrin Falls, Ohio 44022

Full name of second inventor David A. Vasko

Inventor's Signature *David A. Vasko* Date 8/27/2000  
Citizenship U.S.  
Residence Macedonia, Ohio

Post Office Address 9480 Woodview Drive, Macedonia, Ohio 44056

Full name of third inventor Joseph A. Lenner

Inventor's Signature

Citizenship U.S.

Residence Hudson, Ohio

Date

8/28/00

Post Office Address 7578 Bendleton Drive, Hudson, Ohio 44056

Full name of fourth inventor Kenwood H. Hall

Inventor's Signature

Citizenship U.S.

Residence Hudson, Ohio

Date


8/23/00

Post Office Address 1768 East Sapphire Drive, Hudson, Ohio 44236

110003.97061

4604098

United States Patent & Trademark Office  
Office of Initial Patent Examination -- Scanning Division

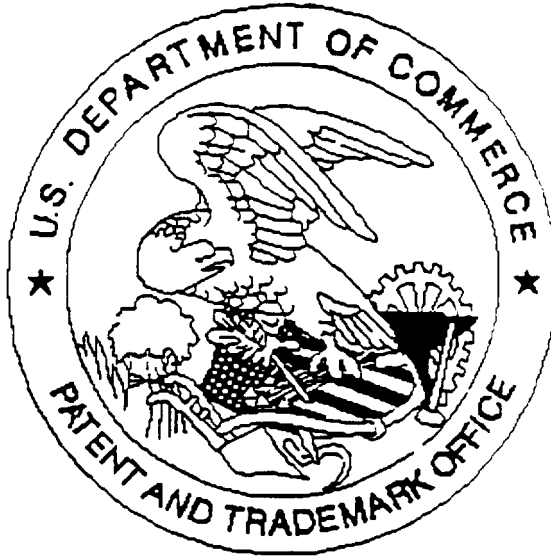

SCANNED, # 24

Application deficiencies were found during scanning:

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not present  
for scanning. (Document title)

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not present  
for scanning. (Document title)

☐ Scanned copy is best available.

Specs start with page 2.